


BA-4500D

Class-D Four-Channel Power Amplifier

19" 1U • 4 × 500 W • 100 V / 4–16 Ω • Class-D

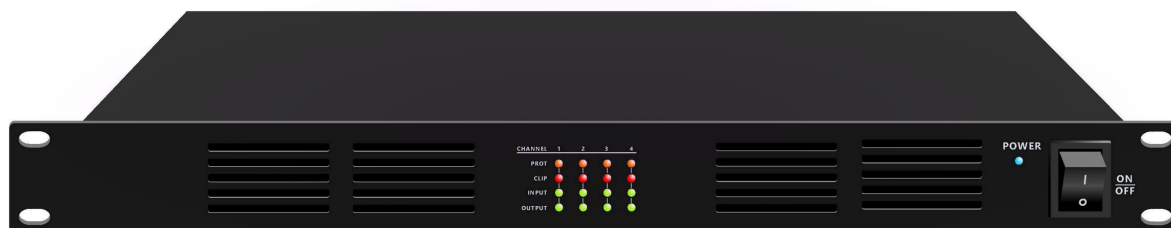

Front Panel



4 × 500 W
Class-D



100 V & 4–16 Ω
Outputs



85% Efficiency
Auto Standby



19" 1U
Rack Mount



Balanced
Phoenix Inputs



Full
Protection

Description

The BA-4500D Class-D four-channel power amplifier uses switching power technology for high efficiency (up to 85%) and minimum power consumption, saving rack space and running cooler for a longer service life. With a rated output of 4 × 500 W, it can serve as a four-zone, multi-source public address system at minimum cost. Its 100 V high-impedance and 4–16 Ω low-impedance outputs suit both fixed PA installations and hi-fi stereo systems.

Key Features

- ✓ Class-D digital power amplifier with switching power supply technology.
- ✓ High efficiency up to 85%, with minimum power consumption and less heat.
- ✓ Four-channel amplifier in a 19" rack-mount, 1U chassis.
- ✓ Rated power output: 4 × 500 W.
- ✓ Separate speaker outputs on each of the four channels: 100 V line and 4–16 Ω low impedance.
- ✓ Balanced line inputs on Phoenix connectors, each with its own gain control.
- ✓ Switchable high-pass / low-pass filter on each channel (DIP switch).
- ✓ Auto standby after one minute without signal, with instant wake-up on input.
- ✓ Separate channel indicators for protection, clip, input and output.
- ✓ Full protection: short circuit, overload, high temperature, clip and DC.
- ✓ Wide AC input from 110 V to 230 V, 50–60 Hz.

Tender Specification


The power amplifier shall be a Class-D four-channel unit with switching power supply, in a 19" 1U rack-mount chassis, with efficiency up to 85%. Rated output shall be 4 × 500 W, with separate 100 V and 4–16 Ω speaker outputs per channel. Each channel shall have a balanced Phoenix input (0.775 V, 10 kΩ) with its own gain control and a switchable filter. Frequency response shall be 20 Hz – 20 kHz (+1/-2 dB), with THD < 0.1%, S/N ratio > 80 dB and crosstalk > 60 dB. It shall include auto standby, protection / clip / input / output indicators, and short-circuit, overload, over-temperature, clip and DC protection. It shall operate from a wide AC input of 110–230 V, consume 2250 W, measure 482 × 420 × 44 mm and weigh 10.0 kg.



Specifications

Model	BA-4500D
Description	Class-D Four-Channel Power Amplifier
Rated Power Output	4 × 500 W
Speaker Output	4–16 Ω & 100 V
Frequency Response	Filter off: 20 Hz – 20 kHz (+1/-2 dB) Filter on: 70 Hz – 10 kHz (+1/-3 dB)
Input	0.775 V (0 dBu), balanced, Phoenix connector
Input Impedance	10 kΩ
THD	< 0.1% (1 kHz / -3 dBV)
S/N Ratio	> 80 dB
Crosstalk	> 60 dB (1 kHz, max. output)
Power Consumption	2250 W
Power Supply	Wide AC input 110 V – 230 V, 50–60 Hz
Dimensions (W × D × H)	482 × 420 × 44 mm
Net Weight	10.0 kg

Rear Panel

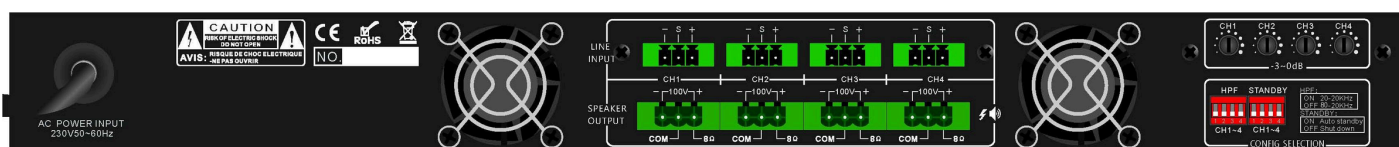

Applications



Voice Evacuation
Schools, Airports, Train Stations



Education & Training
Classrooms, Lecture Halls



AV Control Systems
Hotels, Convention Centres