

PS-530K

Pendant Speaker

5.25" 2-Way • 30 W • 100 V / 8 Ω • IP44

IDEAL FOR

Restaurants

Offices

Auditoriums

Gymnasiums

Shopping Malls



IP44
Indoor



IP44
Indoor Use



BGM & Paging



**5.25" Woofer
1" Tweeter**



**30 W
Max. Tap**



**100 V / 8 Ω
Power Tapping**



**Safety
Hanging Wire**

Key Features

- ✓ Indoor public address (PA) pendant speaker.
- ✓ Commercial audio pendant speaker with built-in transformer.
- ✓ Ideal for background music (BGM) and paging systems.
- ✓ Indoor applications: restaurants, offices, auditoriums, gymnasiums and shopping malls.
- ✓ IP44-rated indoor pendant speaker with safety hanging wire.
- ✓ UV-resistant ABS cabinet and metal grille for durable use, in black.
- ✓ 5.25" woofer and 1" tweeter, 2-way speaker system.
- ✓ 100 V power taps: 30 / 15 / 7.5 / 3.8 W, or 8 Ω low-impedance operation.


Specifications

Model	PS-530K
Description	Pendant Speaker
Power Taps (100 V)	30 / 15 / 7.5 / 3.8 W & 8 Ω
Speaker Unit	5.25" woofer + 1" tweeter, 2-way system
Frequency Response	65 Hz – 20 kHz
Sensitivity (1 W / 1 m)	90 dB
IP Rating	IP44
Dimensions (Ø × H)	Ø 195 × 250 mm
Material	UV-resistant ABS enclosure, metal grille
Color	Black
Mounting	Pendant, with safety hanging wire
Net Weight	2.4 kg

Product Views & Dimensions




Rear Panel
& Driver

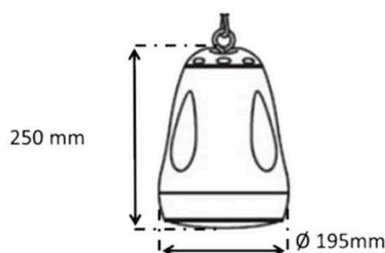

Dimensions

Installation

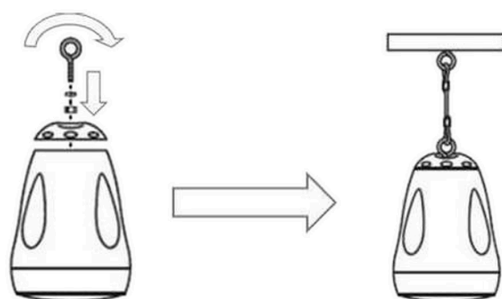


1. Fit the eyebolt to the speaker top


2. Hang with the safety wire

SPL & Impedance vs Frequency

SPL vs Frequency

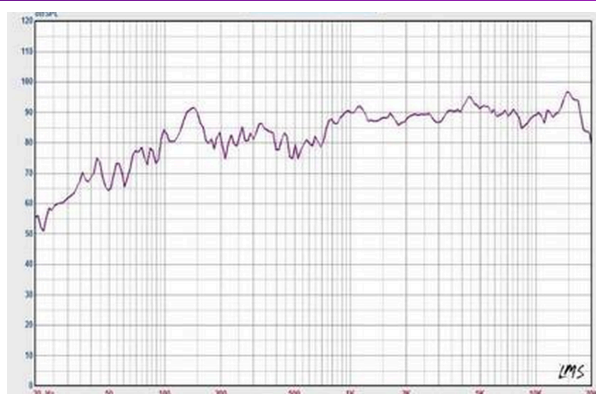

Impedance vs Frequency (all taps)

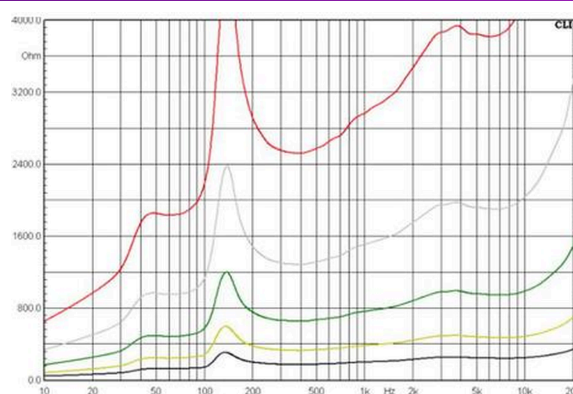

Tender Specification

The pendant loudspeaker shall be a 2-way design with a 5.25" woofer and a 1" tweeter, intended for indoor background music and paging applications. It shall incorporate a 100 V line transformer with power taps of 30 W, 15 W, 7.5 W and 3.8 W, or operate as a low-impedance 8 Ω version. Frequency response shall be 65 Hz – 20 kHz, with a sensitivity of 90 dB (1 W / 1 m). The enclosure shall be made of UV-resistant ABS with a metal grille, finished in black, and rated IP44 for indoor use. The loudspeaker shall be supplied with a safety hanging wire for pendant installation. Dimensions shall be Ø 195 × 250 mm, with a net weight of 2.4 kg.